

# Product datasheet

Specifications



## Discrete I/O module, Modicon TM3, 8 IO (4 inputs, 4 relay outputs, spring) 24 VDC

TM3DM8RG

### Main

|                           |  |
|---------------------------|--|
| Range of product          | Modicon TM3  |
| Product or component type | Discrete I/O module  |
| Range compatibility       | Modicon M241<br>Modicon M251<br>Modicon M221<br>Modicon M262 |
| Discrete input number     | 4 for input conforming to IEC 61131-2 Type 1                 |
| Discrete input voltage    | 24 V   |
| Discrete input current    | 7 mA for input   |
| Discrete output type      | Relay normally open  |
| Discrete output number    | 4  |
| Discrete output logic     | Positive or negative   |
| Discrete output voltage   | 24 V DC for relay output<br>240 V AC for relay output        |
| Discrete output current   | 2000 mA for relay output                                     |

### Complementary

|                                   |   |
|-----------------------------------|---|
| Discrete I/O number               | 8   |
| Current consumption               | 5 mA at 5 V DC via bus connector (at state off)<br>0 mA at 24 V DC via bus connector (at state on)<br>0 mA at 24 V DC via bus connector (at state off)<br>25 mA at 5 V DC via bus connector (at state on) |
| Discrete input voltage type       | DC  |
| Voltage state 1 guaranteed        | 15...28.8 V for input   |
| Current state 1 guaranteed        | $\geq 2.5$ mA (input)   |
| Voltage state 0 guaranteed        | 0...5 V for input   |
| Current state 0 guaranteed        | $\leq 1$ mA (input)   |
| Input impedance                   | 3.4 kOhm  |
| Response time                     | 4 ms (turn-on)<br>4 ms (turn-off)   |
| Maximum current per output common | 7 A   |
| Mechanical durability             | 20000000 cycles   |
| Minimum load                      | 10 mA at 5 V DC for relay output  |

|   |   |
|---|---|
| <b>Local signalling</b>                       | 1 LED per channel (green) for I/O state   |
| <b>Electrical connection</b>                  | 11 x 2.5 mm <sup>2</sup> removable spring terminal block with pitch 5.08 mm adjustment for inputs and outputs   |
| <b>Maximum cable distance between devices</b> | Unshielded cable: <30 m for regular input   |
| <b>Insulation</b>                             | Between input and internal logic at 500 V AC<br>Non-insulated between inputs<br>Between input groups and output groups at 1500 V AC<br>Between open contact at 750 V AC<br>Between output and internal logic at 500 V AC<br>Non-insulated between outputs |
| <b>Marking</b>                                | CE  |
| <b>Mounting support</b>                       | Top hat type TH35-15 rail conforming to IEC 60715<br>Top hat type TH35-7.5 rail conforming to IEC 60715<br>plate or panel with fixing kit   |
| <b>Height</b>                                 | 90 mm   |
| <b>Depth</b>                                  | 84.6 mm   |
| <b>Width</b>                                  | 27.4 mm   |
| <b>Net weight</b>                             | 0.95 kg   |
| <b>Environment</b>                            |   |
| <b>Standards</b>                              | EN/IEC 61010-2-201<br>EN/IEC 61131-2  |
| <b>Product certifications</b>                 | cULus<br>C-Tick   |
| <b>Resistance to electrostatic discharge</b>  | 8 kV in air conforming to EN/IEC 61000-4-2<br>4 kV on contact conforming to EN/IEC 61000-4-2  |
| <b>Resistance to electromagnetic fields</b>   | 10 V/m 80 MHz...1 GHz conforming to EN/IEC 61000-4-3<br>3 V/m 1.4 GHz...2 GHz conforming to EN/IEC 61000-4-3<br>1 V/m 2 GHz...3 GHz conforming to EN/IEC 61000-4-3  |
| <b>Resistance to magnetic fields</b>          | 30 A/m 50/60 Hz conforming to EN/IEC 61000-4-8  |
| <b>Resistance to fast transients</b>          | 1 kV for I/O conforming to EN/IEC 61000-4-4<br>2 kV for relay output conforming to EN/IEC 61000-4-4   |
| <b>Surge withstand</b>                        | 2 kV output common mode conforming to EN/IEC 61000-4-5<br>1 kV input common mode conforming to EN/IEC 61000-4-5   |
| <b>Resistance to conducted disturbances</b>   | 10 V 0.15...80 MHz conforming to EN/IEC 61000-4-6<br>3 V spot frequency (2, 3, 4, 6.2, 8.2, 12.6, 16.5, 18.8, 22, 25 MHz) conforming to Marine specification (LR, ABS, DNV, GL)   |
| <b>Electromagnetic emission</b>               | Radiated emissions - test level: 40 dB $\mu$ V/m QP class A ( 10 m) at 30...230 MHz conforming to EN/IEC 55011<br>Radiated emissions - test level: 47 dB $\mu$ V/m QP class A ( 10 m) at 230...1000 MHz conforming to EN/IEC 55011                        |
| <b>Ambient air temperature for operation</b>  | -10...35 °C vertical installation<br>-10...55 °C horizontal installation  |
| <b>Ambient air temperature for storage</b>    | -25...70 °C   |
| <b>Relative humidity</b>                      | 10...95 %, without condensation (in operation)<br>10...95 %, without condensation (in storage)  |
| <b>IP degree of protection</b>                | IP20 with protective cover in place   |
| <b>Pollution degree</b>                       | 2   |
| <b>Operating altitude</b>                     | 0...2000 m  |
| <b>Storage altitude</b>                       | 0...3000 m  |
| <b>Vibration resistance</b>                   | 3.5 mm at 5...8.4 Hz on DIN rail<br>3 gn at 8.4...150 Hz on DIN rail<br>3.5 mm at 5...8.4 Hz on panel<br>3 gn at 8.4...150 Hz on panel  |
| <b>Shock resistance</b>                       | 15 gn for 11 ms   |

## Packing Units

|                              |          |
|------------------------------|----------|
| Unit Type of Package 1       | PCE      |
| Number of Units in Package 1 | 1        |
| Package 1 Height             | 7.5 cm   |
| Package 1 Width              | 12.5 cm  |
| Package 1 Length             | 10.5 cm  |
| Package 1 Weight             | 230.0 g  |
| Unit Type of Package 2       | S04      |
| Number of Units in Package 2 | 27       |
| Package 2 Height             | 30.0 cm  |
| Package 2 Width              | 40.0 cm  |
| Package 2 Length             | 60.0 cm  |
| Package 2 Weight             | 6.821 kg |


## Offer Sustainability

|                            |   |
|----------------------------|---|
| Sustainable offer status   | Green Premium product   |
| REACH Regulation           | <a href="#">REACH Declaration</a>   |
| REACH free of SVHC         | Yes   |
| EU RoHS Directive          | Pro-active compliance (Product out of EU RoHS legal scope)<br><a href="#">EU RoHS Declaration</a>                           |
| Toxic heavy metal free     | Yes   |
| Mercury free               | Yes   |
| RoHS exemption information | <a href="#">Yes</a>   |
| China RoHS Regulation      | <a href="#">China RoHS declaration</a>  |
| Environmental Disclosure   | <a href="#">Product Environmental Profile</a>   |
| Circularity Profile        | <a href="#">End of Life Information</a>   |
| WEEE                       | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins |
| PVC free                   | Yes   |

Dimensions


---

mm  
in.

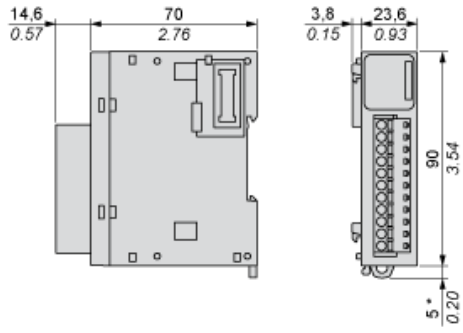


(\*) 8.5 mm/0.33 in. when the clamp is pulled out.

Spacing Requirements

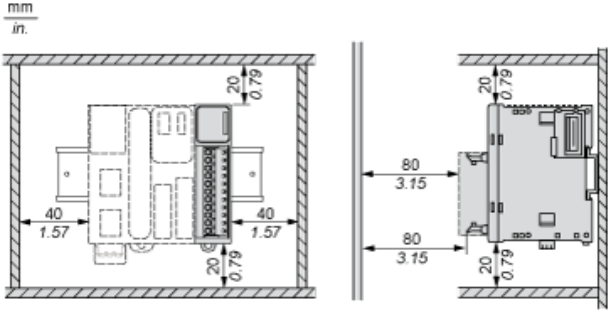


**Mounting on a Rail**

---

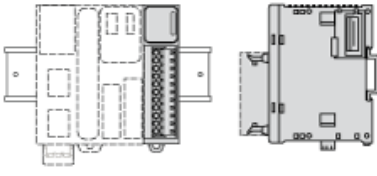


**Incorrect Mounting**

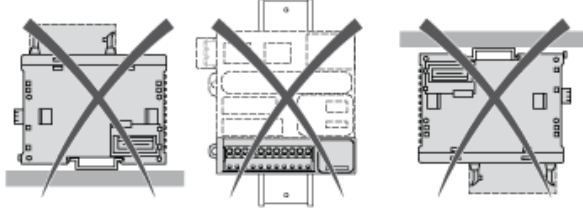


**Mounting on a Panel Surface**

---

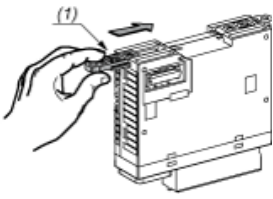


(1) Install a mounting strip

**Mounting Hole Layout**

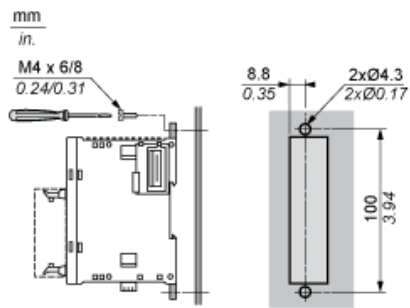

Digital Mixed I/O Module (8-channel)

Wiring Diagram (Sink / Source)

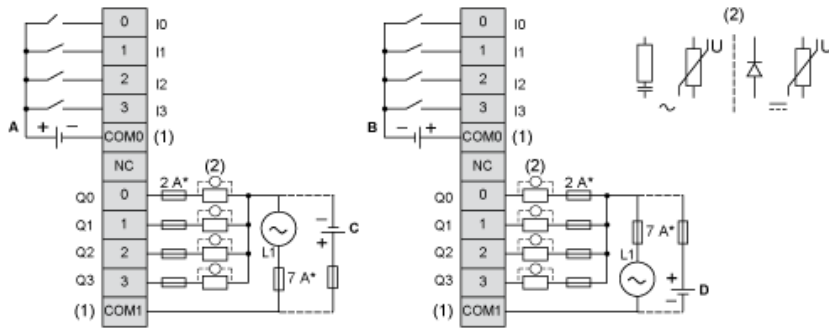

- (\*) Type T fuse
- (1) The COM0 and COM1 terminals are **not** connected internally.
- (2) To improve the life time of the contacts, and to protect from potential inductive load damage, it is recommended to connect a free wheeling diode
- (A) Sink wiring (positive logic)
- (B) Source wiring (negative logic)
- (C) Source wiring (positive logic)
- (D) Sink wiring (negative logic)

Recommended replacement(s)